










NOTES:

- 1.HOUSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.



MATING HEIGHT	PLUG (H.)	SOCKET (H.)
3.0	0.8	2.2
3.5	1.3	2.2
4.0	1.0	3.0
4.5	1.0	3.5
5.0	1.0	4.0
5.5	2.0	4.5
6.0	2.0	4.0
6.5	2.0	4.5

NO of contacts	Dimensions				NO of contacts	Dimensions			
	A.	B.	C.	D.		A.	B.	C.	D.
4	3.70	0.50	1.56	2.40	54	16.20	13.00	14.06	14.90
6	4.20	1.00	2.06	2.90	56	16.70	13.50	14.56	15.40
8	4.70	1.50	2.56	3.40	58	17.20	14.00	15.06	15.90
10	5.20	2.00	3.06	3.90	60	17.70	14.50	15.56	16.40
12	5.70	2.50	3.56	4.40	62	18.20	15.00	16.06	16.90
14	6.20	3.00	4.06	4.90	64	18.70	15.50	16.56	17.40
16	6.70	3.50	4.56	5.40	66	19.20	16.00	17.06	17.90
18	7.20	4.00	5.06	5.90	68	19.70	16.50	17.56	18.40
20	7.70	4.50	5.56	6.40	70	20.20	17.00	18.06	18.90
22	8.20	5.00	6.06	6.90	72	20.70	17.50	18.56	19.40
24	8.70	5.50	6.56	7.40	74	21.20	18.00	19.06	19.90
26	9.20	6.00	7.06	7.90	76	21.70	18.50	19.56	20.40
28	9.70	6.50	7.56	8.40	78	22.20	19.00	20.06	20.90
30	10.20	7.00	8.06	8.90	80	22.70	19.50	20.56	21.40
32	10.70	7.50	8.56	9.40	82	23.20	20.00	21.06	21.90
34	11.20	8.00	9.06	9.90	84	23.70	20.50	21.56	22.40
36	11.70	8.50	9.56	10.40	86	24.20	21.00	22.06	22.90
38	12.20	9.00	10.06	10.90	88	24.70	21.50	22.56	23.40
40	12.70	9.50	10.56	11.40	90	25.20	22.00	23.06	23.90
42	13.20	10.00	11.06	11.90	92	25.70	22.50	23.56	24.40
44	13.70	10.50	11.56	12.40	94	26.20	23.00	24.06	24.90
46	14.20	11.00	12.06	12.90	96	26.70	23.50	24.56	25.40
48	14.70	11.50	12.56	13.40	98	27.20	24.00	25.06	25.90
50	15.20	12.00	13.06	13.90	100	27.70	24.50	25.56	26.40

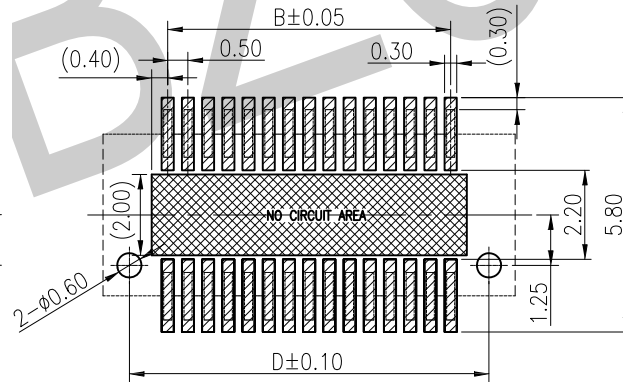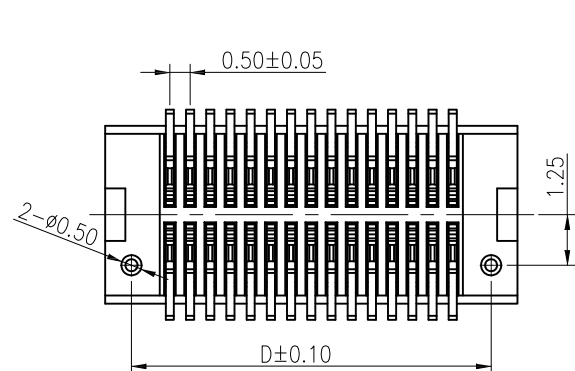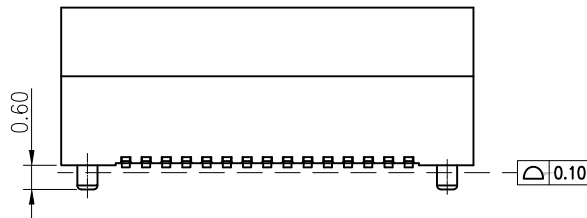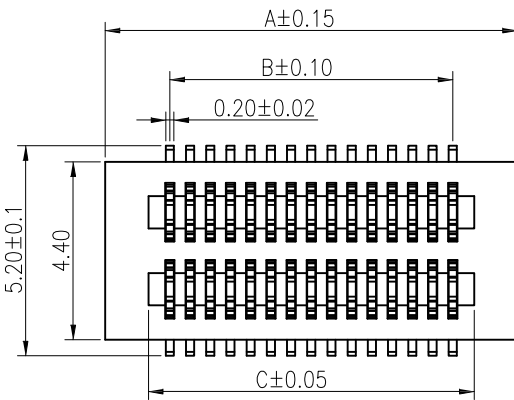

BT 050-0XX-2XX-F-WVS-G1-E-RC-050-PC-000

板对板
间距:0.5MM
塑胶高度:
022:2.2
030:3.0
035:3.5
040:4.0
045:4.5
F:母座

流水码
颜色:黑色
板对板合高:
030:3.0
035:3.5
040:4.0
045:4.5
050:5.0
055:5.5
060:6.0
065:6.5

RC:卷装+CAP
E:PA9T
G1:镀金 1U"
180° SMT

PIN数:
202:2*2P
203:2*3P
.....
250:2*50P




TOLERANCE UNLESS OTHERWISE SPECIFIED		BZOC 东莞市柏洲电子有限公司 Dongguan Bzoc Electronics, Ltd	
.X± 0.35	X.'± 1.5'	APR. AX.T	TITLE: 0.5mm 双槽 板对板 母座
.XX± 0.25	.X'± 1.0'	CHK. Y.L	PART NO. BT050-xxx-2xx-FS-G1-E-RC-XXX-001
.XXX± 0.15	.XX'± 0.5'	DRA. Y.L	PROJ. UNITS. MM SCALE: 1:1 SHEET. 1 / 1
REV. ECN. NO. APR. DATE		CUSTOMER DRAWING	

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE







NOTES:

- 1.HOUSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 2.TERMINAL:PHOSPHOR BRONZE
PLATING:1*''GOLD FLASH OVERALL 50~100*''NICKEL UNDER PLATED.

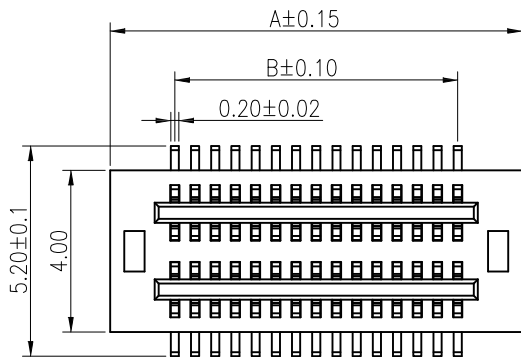

NO.of contacts	Dimensions				NO.of contacts	Dimensions			
	A.	B.	C.	D.		A.	B.	C.	D.
4	3.70	0.50	1.50	2.40	54	16.20	13.00	14.00	14.90
6	4.20	1.00	2.00	2.90	56	16.70	13.50	14.50	15.40
8	4.70	1.50	2.50	3.40	58	17.20	14.00	15.00	15.90
10	5.20	2.00	3.00	3.90	60	17.70	14.50	15.50	16.40
12	5.70	2.50	3.50	4.40	62	18.20	15.00	16.00	16.90
14	6.20	3.00	4.00	4.90	64	18.70	15.50	16.50	17.40
16	6.70	3.50	4.50	5.40	66	19.20	16.00	17.00	17.90
18	7.20	4.00	5.00	5.90	68	19.70	16.50	17.50	18.40
20	7.70	4.50	5.50	6.40	70	20.20	17.00	18.00	18.90
22	8.20	5.00	6.00	6.90	72	20.70	17.50	18.50	19.40
24	8.70	5.50	6.50	7.40	74	21.20	18.00	19.00	19.90
26	9.20	6.00	7.00	7.90	76	21.70	18.50	19.50	20.40
28	9.70	6.50	7.50	8.40	78	22.20	19.00	20.00	20.90
30	10.20	7.00	8.00	8.90	80	22.70	19.50	20.50	21.40
32	10.70	7.50	8.50	9.40	82	23.20	20.00	21.00	21.90
34	11.20	8.00	9.00	9.90	84	23.70	20.50	21.50	22.40
36	11.70	8.50	9.50	10.40	86	24.20	21.00	22.00	22.90
38	12.20	9.00	10.00	10.90	88	24.70	21.50	22.50	23.40
40	12.70	9.50	10.50	11.40	90	25.20	22.00	23.00	23.90
42	13.20	10.00	11.00	11.90	92	25.70	22.50	23.50	24.40
44	13.70	10.50	11.50	12.40	94	26.20	23.00	24.00	24.90
46	14.20	11.00	12.00	12.90	96	26.70	23.50	24.50	25.40
48	14.70	11.50	12.50	13.40	98	27.20	24.00	25.00	25.90
50	15.20	12.00	13.00	13.90	100	27.70	24.50	25.50	26.40

MATING HEIGHT	PLUG (H.)	SOCKET (H.)	E
3.0	0.8	2.2	1.6
3.5	1.3	2.2	1.6
4.0	1.0	3.0	1.9
4.5	1.0	3.5	1.9
5.0	1.0	4.0	1.9
5.5	2.0	4.5	1.9
6.0	2.0	4.0	1.9
6.5	2.0	4.5	1.9

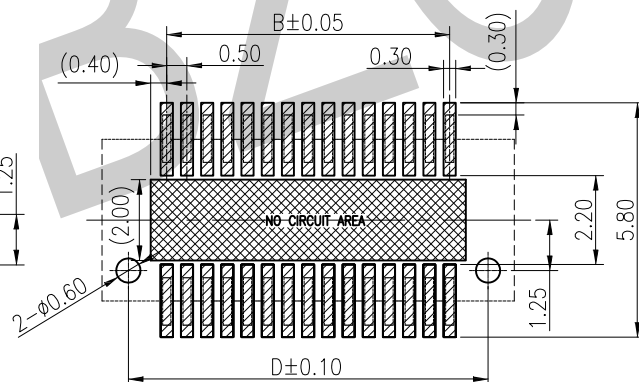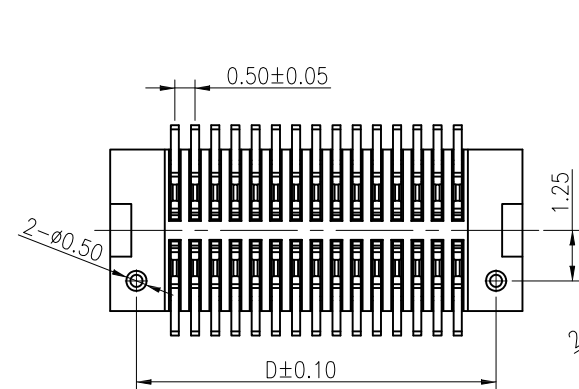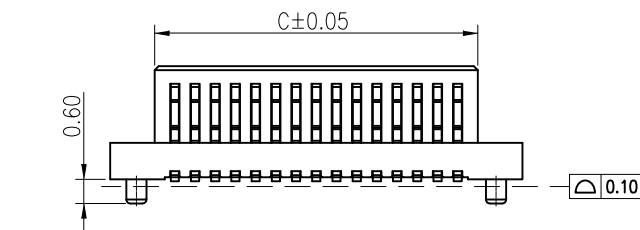

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

BT 050-OXX-2XX-M-WVS-G1-E-RC-050-PC-000

板对板 间距:0.5MM 塑胶高度: 008:0.8 013:1.3 010:1.0 020:2.0 M:母座

PIN数: 202:2*2P 203:2*3P 250:2*50P

流水码 颜色:黑色 板对板合高: 030:3.0 035:3.5 040:4.0 045:4.5 050:5.0 055:5.5 060:6.0 065:6.5

RC:卷装+CAP E:PA9T G1:镀金 1U" 180° SMT

TOLERANCE UNLESS OTHERWISE SPECIFIED		BZOC 东莞市柏洲电子有限公司 Dongguan Bzoc Electronics, Ltd	
.X± 0.35	X.'± 1.5'	APR. AX.T	TITLE: 0.5mm 双槽 板对板 公座
.XX± 0.25	.X'± 1.0'	CHK. Y.L	PART NO. BT050-xxx-2xx-MS-G1-E-RC-XXX-002
.XXX± 0.15	.XX'± 0.5'	DRA. Y.L	PROJ. UNITS. MM SCALE: 1:1 SHEET. 1/1
CUSTOMER DRAWING			

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE