


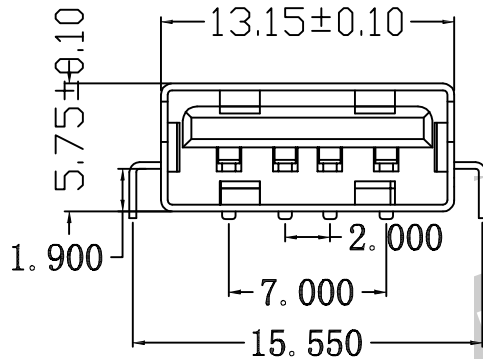


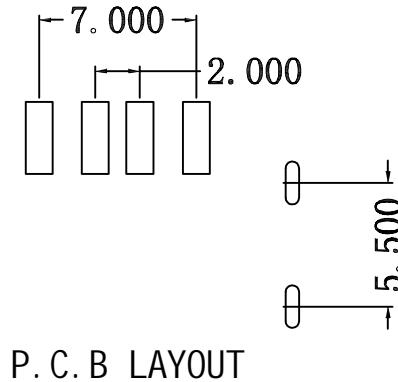

A
B
C
D
E
F

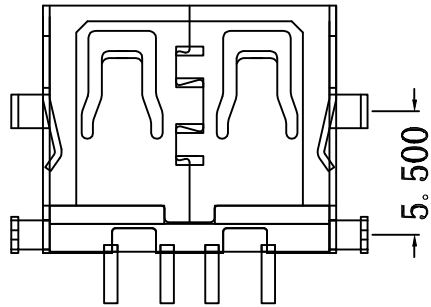

U A20-F-04-10N-WR-GF-F-D-000

USB
A型 2.0
F: 母头(插座)
04: 4PIN
外壳材质:
10: 铜壳
外壳电镀:
N: 镀镍

流水号
包装方式
D: 盒装
塑胶材质:
F: LCP
端子电镀: 镀金
90° SMT

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Material:

1. 塑胶: Housing:
High Temperature Thermoplastics,
UL 94V-0 LCP Black
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳: Shell:
Nickel Plating

TOLERANCE UNLESS OTHERWISE SPECIFIED		BZCOOC 东莞市柏洲电子有限公司 Dongguan Bzooc Electronics, Ltd	
.X± 0.35	X.*± 1.5*	APR. AX.T	TITLE: USB A/F 短体 沉板1.9 四脚 无边 SMT 铜壳
.XX± 0.25	.X*± 1.0*	CHK. Y.L	PART NO.
.XXX± 0.15	.XX*± 0.5*	DRA. Y.L	PROJ. UNITS. MM SCALE. 1:1 SHEET. 1/1
REV.	ECN. NO.	APR.	CUSTOMER DRAWING

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

1 2 3 4 5 6 7 8