




**Note:**  
 1. Material:  
 1.1 Housing: thermoplastic high temp.UL94V-0; Color: natural.  
 1.2 Latch: thermoplastic high temp.UL94V-0; Color: black.  
 1.3 Terminal: copper alloy.  
 1.4 Fitting Nail: copper alloy.  
 2. Finish:  
 2.1 Terminal:  
 Underplating: matt Tin overall.  
 2.2 Fitting Nail:  
 Underplating: matt Tin overall.  
 3. Product must comply HF RoHS specification.

**Note:**  
**Electrical Characteristics:**  
 Current rating: 0.4A AC/DC  
 Voltage rating: 50V AC/DC  
 Temperature range: -25°C~+85°C  
 Withstand Voltage: 200V AC/Minute  
 Contact Resistance: 20mΩ  
 Insulation resistance: 500 MΩ  
 Relative Humidity: 93%+40°C

H	CKTS	DIM A	DIM B	DIM C
2.2	24P	17.60	12.55	11.50
2.5	30P	20.60	15.55	14.50
	40P	25.60	20.55	19.50
	50P	30.60	25.55	24.50
	60P	35.60	30.55	29.50

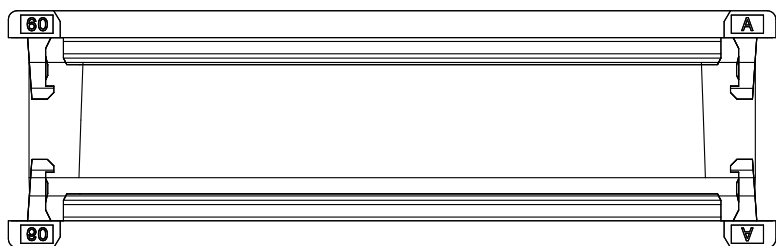

EP 050-XXX-OXX-ZJT-MT-F-T-000  
 FPC 流水号  
 间距0.5MM  
 塑胶高度:  
 022:2.2MM  
 025:2.5MM  
 包装:  
 T: 管装  
 F:LCP  
 雾锡  
 PIN数:  
 024:24PIN  
 030:30PIN  
 040:40PIN  
 050:50PIN  
 060:60PIN

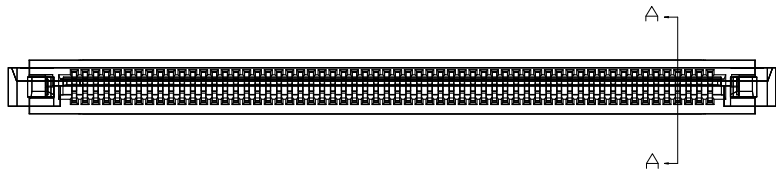


A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>BZOC</b> 东莞市柏洲电子有限公司 Dongguan Bzoc Electronics, Ltd	
.X± 0.35	X.*± 1.5*	APR. AX.T	TITLE: 0.5MM FPC 转接头 抽屉式
.XX± 0.25	.X*± 1.0*	CHK. Y.L	PART NO.
.XXX± 0.15	.XX*± 0.5*	DRA. Y.L	PROJ.
		UNITS. MM	SCALE: 1:1
		CUSTOMER DRAWING	
		SHEET. 1 / 1	



RoHS  
Compliant

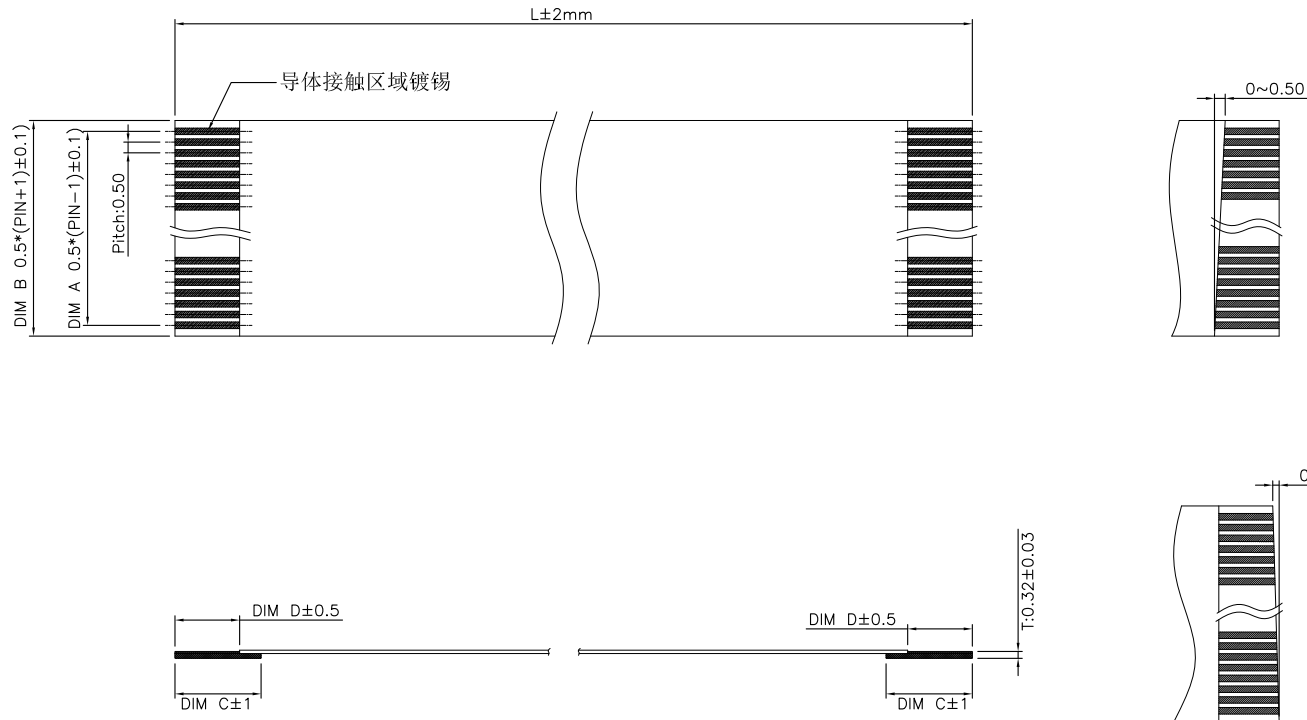

STRUCTURE(结构)		
No.	ITEM (项目)	SPECIFICATION (规格)
1	INSULATION (胶膜)	UL
		WHITE(白色)
2	SUPPORTING TAPE (补强板)	BLUE(蓝色)
3	CONDUCTOR (导体)	THICKNESS (厚度) 0.035±0.005mm
		WIDTH (宽度) 0.30±0.03mm
4	CONDUCTOR PLATING (导体镀层)	PLATED(电镀 Sn(锡) 40u")

DIMENSION(尺寸)		
1	No. of conductors (导体数目)	N
2	Pitch (间距)	Pitch: 0.5mm±0.08
3	Span (总间距)	DIM A: 0.5mm*(PIN-1)
4	Width(总宽度)	DIM B: 0.5mm*(PIN+1)
5	Insert Thickness (接线端厚度)	T: 0.32mm±0.03
6	Strip Length (导体长度)	DIM D: 3mm
7	Supporting Tape Length (补强板长度)	DIM C: 4mm

FF 050-XXX-T-34-100-WE-0-P-000

FFC排线  
 间距: 050: 0.5mm  
 PIN数: 004: 4PIN  
 005: 5PIN  
 .....  
 T: 两端导体同面  
 34: 导体长度3mm/补强板长度4mm

流水号  
 P: 袋装  
 0: 不包布  
 绝缘胶膜颜色:  
 WE: 白色





总长度:  
 100:L: 100mm  
 长度可定制

TOLERANCE UNLESS OTHERWISE SPECIFIED				<b>BZOOC</b> 东莞市柏洲电子有限公司 Dongguan BzooC Electronics, Ltd	
.X± 0.35	X.'± 1.5'	APR. AX.T	TITLE: 0.5FFC排线 同向 3/4 白膜		
.XX± 0.25	.X'± 1.0'	CHK. Y.L	PART NO.		
.XXX± 0.15	.XX'± 0.5'	DRA. Y.L	PROJ.	UNITS. MM SCALE: 1:1	SHEET. 1 / 1
REV.	ECN. NO.	APR.	DATE	CUSTOMER DRAWING	

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE



RoHS  
Compliant

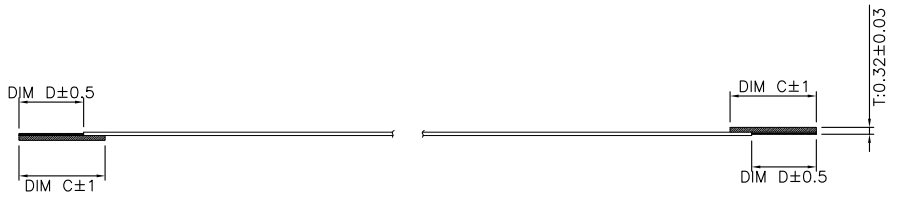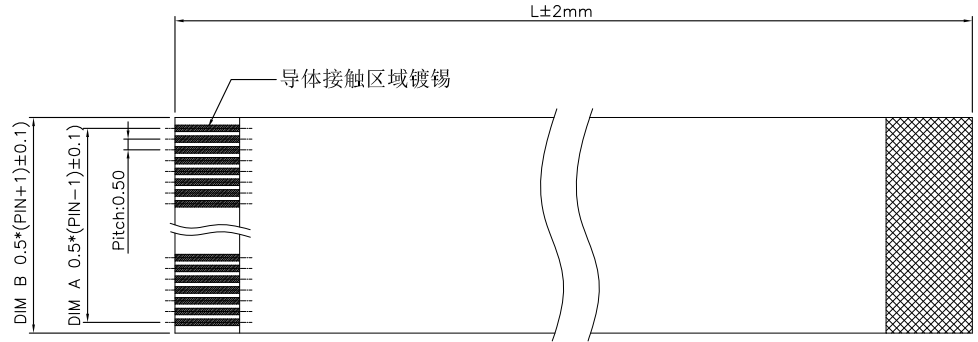

STRUCTURE(结构)		
No.	ITEM (项目)	SPECIFICATION (规格)
1	INSULATION (胶膜)	UL
		WHITE(白色)
2	SUPPORTING TAPE (补强板)	BLUE(蓝色)
3	CONDUCTOR (导体)	THICKNESS (厚度) 0.035±0.005mm
		WIDTH (宽度) 0.30±0.03mm
4	CONDUCTOR PLATING (导体镀层)	PLATED(电镀) Sn(锡) 40u"

DIMENSION(尺寸)		
1	No. of conductors (导体数目)	N
2	Pitch (间距)	Pitch: 0.5mm±0.08
3	Span (总间距)	DIM A: 0.5mm*(PIN-1)
4	Width (总宽度)	DIM B: 0.5mm*(PIN+1)
5	Insert Thickness (接线端厚度)	T: 0.32mm±0.03
6	Strip Length (导体长度)	DIM D: 3mm
7	Supporting Tape Length (补强板长度)	DIM C: 4mm

FF 050-XXX-F-34-100-WE-0-P-000

FFC排线

间距: 050: 0.5mm

PIN数: 004: 4PIN  
005: 5PIN  
.....

F: 两端导体反面

34: 导体长度3mm/补强板长度4mm

流水号

P: 袋装

0: 不包布

绝缘胶膜颜色: WE: 白色

总长度: 100:L: 100mm  
长度定制

TOLERANCE UNLESS OTHERWISE SPECIFIED				<b>BZOOC</b> 东莞市柏洲电子有限公司 Dongguan BzooC Electronics, Ltd	
.X± 0.35	X.'± 1.5'	APR. AX.T	TITLE: 0.5FFC排线 反向 3/4 白膜		
.XX± 0.25	.X'± 1.0'	CHK. Y.L	PART NO.		
.XXX± 0.15	.XX'± 0.5'	DRA. Y.L	PROJ.	UNITS. MM	SCALE. 1:1
REV.	ECN. NO.	APR.	DATE	CUSTOMER DRAWING	
A0	FIRST RELEASE	Y.L	2019.06.21	SHEET. 1 / 1	