
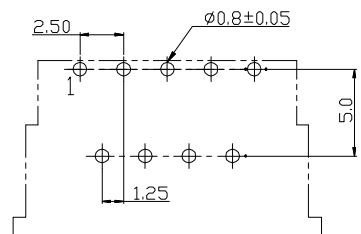



NOTES

HOUSING—PBT UL 94V-0  
 TERMINAL—COPPER ALLOY  
 Electrical Characteristics:  
 Current rating: 0.4A AC/DC  
 Voltage rating: 50V AC/DC  
 Temperature range: -25°C~+85°C  
 Withstand Voltage: 200V AC/Minute  
 Contact Resistance: 20mΩ  
 Insulation resistance: 500 MΩ  
 Relative Humidity: 93%+40°C

CKT	A	B
3	9.55	5.20
4	10.80	6.45
5	12.05	7.70
6	13.30	8.95
7	14.55	10.20
8	15.80	11.45
9	17.05	12.70
10	18.30	13.95
11	19.55	15.20
12	20.80	16.45
13	22.05	17.70
14	23.30	18.95
15	24.55	20.20
16	25.80	21.45
17	27.05	22.70
18	28.30	23.95
19	29.55	25.20
20	30.80	26.45
21	32.05	27.70
22	33.30	28.95
23	34.55	30.20
24	35.80	31.45
25	37.05	32.70
26	38.30	33.95
27	39.55	35.20
28	40.80	36.45
29	42.05	37.70
30	43.30	38.95
31	44.55	40.20
32	45.80	41.45



RECOMMEND PCB LAYOUT COMPONENT SIDE

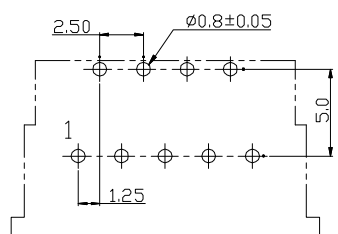

RECOMMEND PCB LAYOUT COMPONENT SIDE

FP 125-050-OXX-WR-SN-A-T-DSX-XXX  
 FPC  
 间距:1.25MM  
 塑胶高度:5.0MM  
 PIN数:  
 003:3PIN  
 004:4PIN  
 .....  
 032:32PIN  
 流水号  
 分类  
 包装方式  
 T: 管装  
 塑胶材质:  
 A:PBT  
 电镀:SN:镀锡

TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>BZOO</b> 东莞市柏洲电子有限公司 Dongguan Bzoo Electronics, Ltd	
.X± 0.35	X.'± 1.5'	APR. AX.T	TITLE: 1.25FPC 带锁弯插
.XX± 0.25	.X'± 1.0'	CHK. Y.L	PART NO.
.XXX± 0.15	.XX'± 0.5'	DRA. Y.L	PROJ.  UNITS: MM SCALE: 1:1 SHEET. 1 / 1
CUSTOMER DRAWING			

A0	FIRST RELEASE	Y.L	2019.06.21
REV.	ECN. NO.	APR.	DATE